




ELECTRICAL DATA

Impedance: 50 ohm
 Frequency Range: DC~13.0GHz
 V.S.W.R: 1.25:1 max.
 Temperature Range: -65°C to +125°C
 PIM: (2x20W)-155dBc @ 800~900MHz Max

Product NO. DOSIN-805-1044

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	JIM	2017. 3. 10	John kine

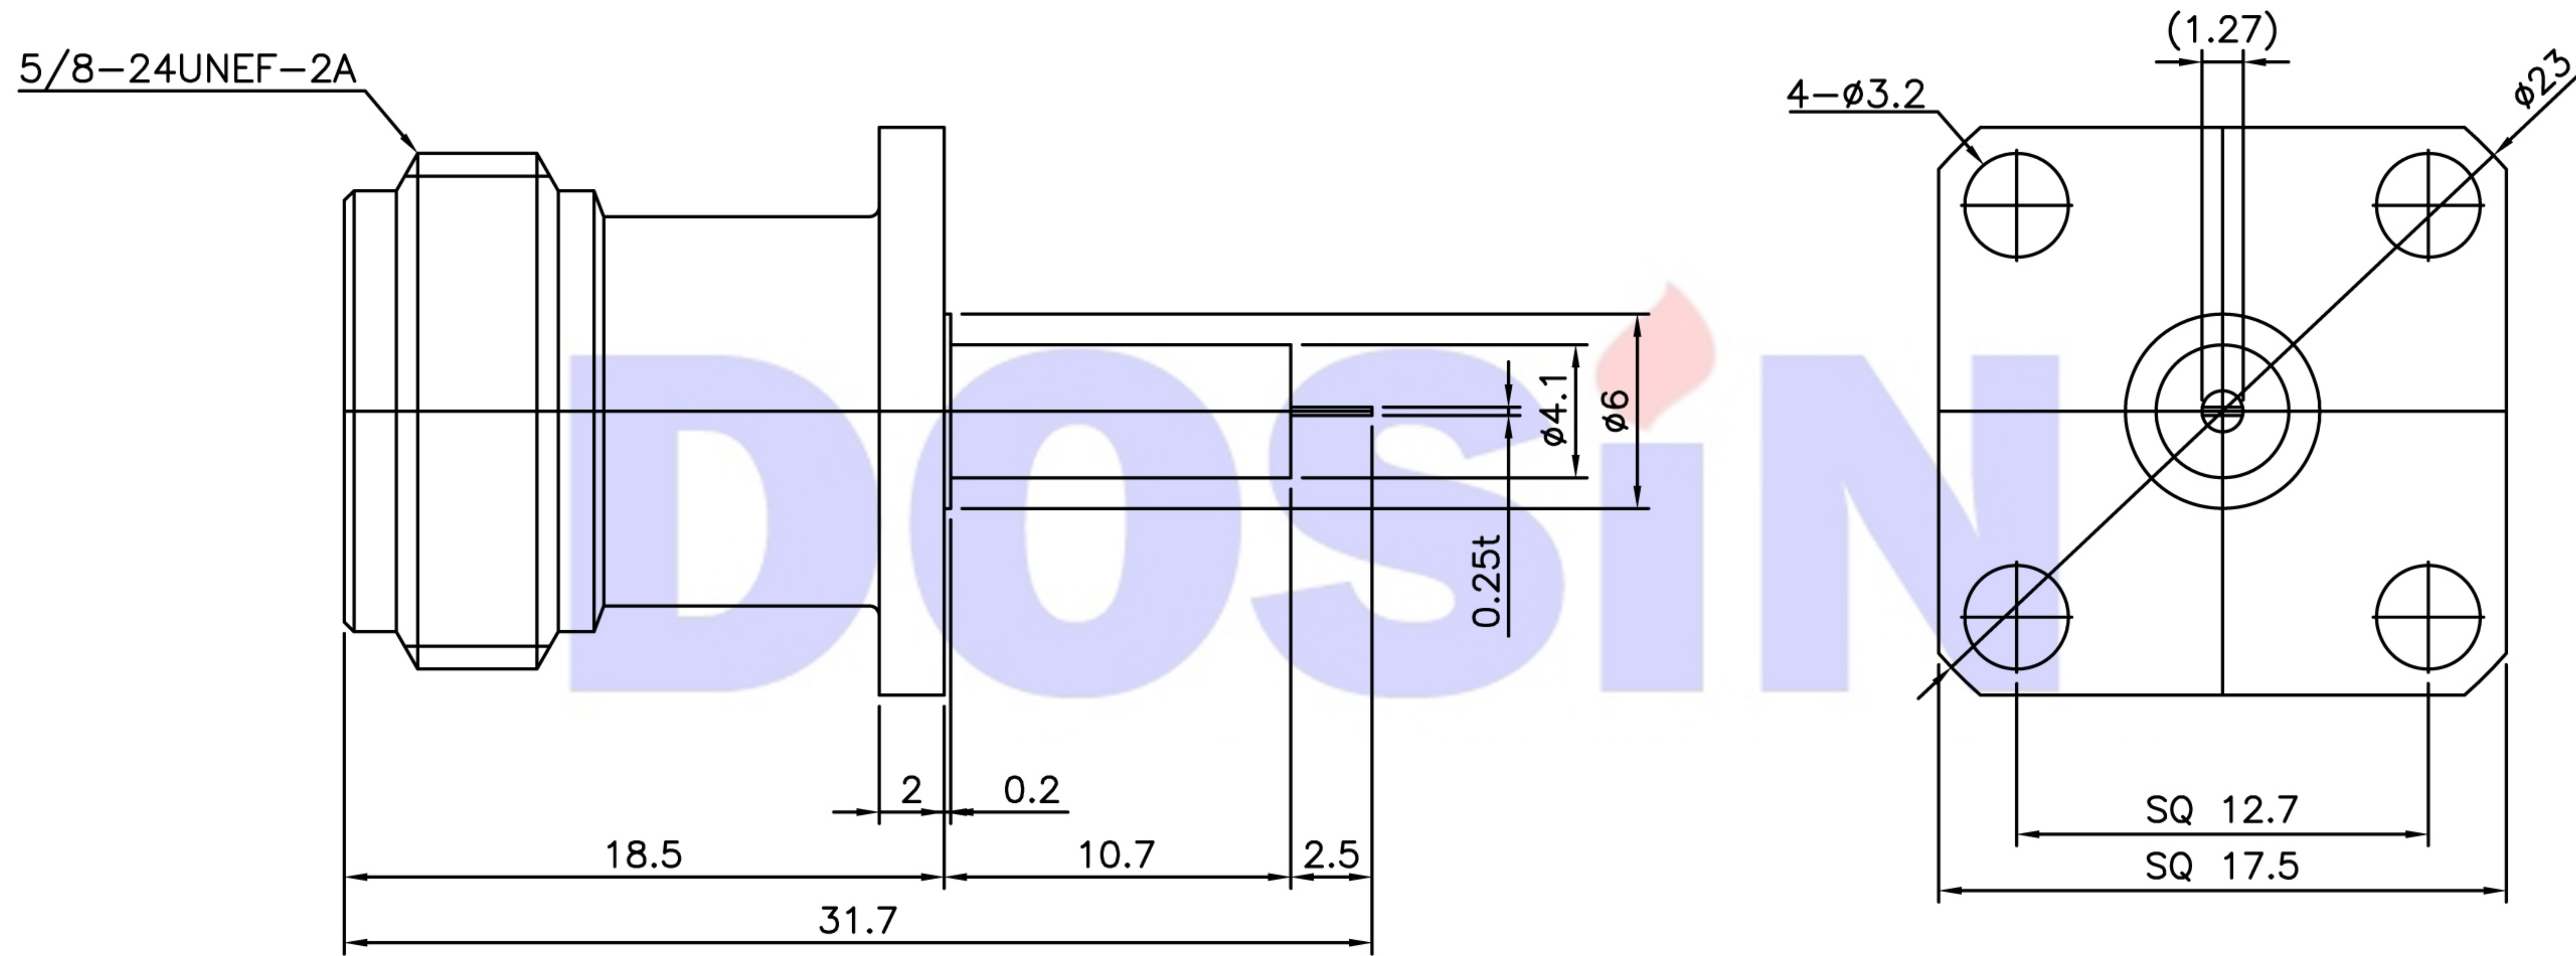

Item	Materials	Plating
Body	Brass	Silver Plated
Center contact	Be-Cu	Silver Plated
Insulator	PTFE	-

N-Type Panel 4Hole(SQ17.5) JACK Receptacle [LOW PIM]

NOTE:	Tolerance	0-6 ±0.05 6-30 ±0.10 30-120 ±0.20 Angular ±2°
DRAWN Zelin. Zhang	2017. 3. 10	View
CHECKED		UNIT MM
APPROVALS John		SCALE 1:1



Dosin Industrial(H.K)Co.Ltd

东莞市德索五金电子制品有限公司

Dosin Hardware Electronics Co.,Ltd

E-mail:dosin2005@163.com
 dosin2005@dosin-china.com
 Web:http://www.dosinconn.com
 TEL:(0086)769-81153906
 FAX:(0086)769-81875836

Name: N Type Panel Receptacle Jack 4Holes SQ17.5

SIZE A	Product NO. DOSIN-805-1044	REV B
-----------	----------------------------	----------

DateTime 2017. 3. 10	CAD FILE D/company drawings/BD	SHEET: 1 OF 1
-------------------------	-----------------------------------	---------------