




Product NO.	RHT-622-0005			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr.CHEN	2017/10/24	John kine

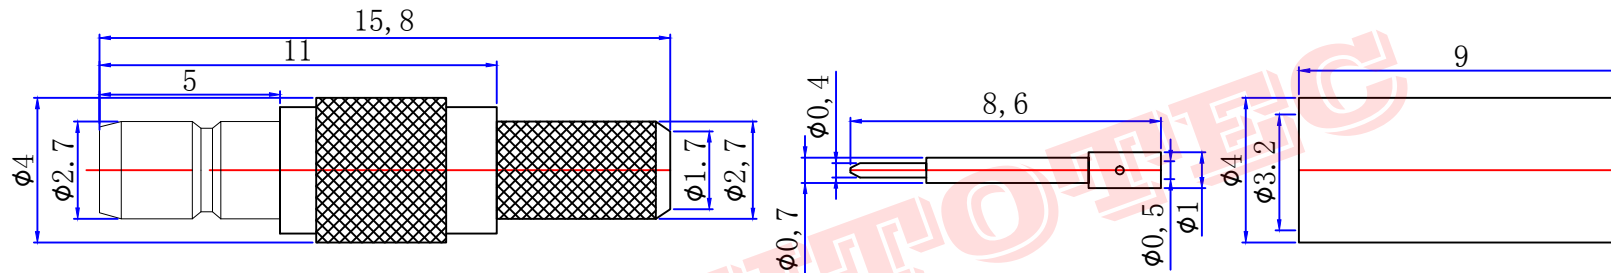

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~8GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -65°C TO +165°C
 Relative temperature: ≤95% (40° C ± 2° C)

1	Body	Brass	GOLD	NOTE:	Tolerance	0-6	±0.10	 RENHOTEC GROUP www.renhotec.com
2	Insulator	TEFLON	White			6-30	±0.20	
3	Center contact	Phosphor	GOLD			30-120	±0.30	
4	FERRULE	Brass	NICKEL			Angular	±2°	
5				DRAWN	2017/10/24	View		Name: SSMB JACK FOR RG316 RG174 CABLE
6				Zelin.Zhang	24			
7				CHECKED		UNIT	MM	SIZE
8				APPROVALS		SCALE	1:1	Product NO. RHT-622-0005
9				John	24/10.2017	DateTime	2017/10/24	CAD FILE
10	Component Number	Material	Finish	John	24/10.2017	SCALE	1:1	D/company drawings/BD
1				Kine				SHEET: 1 OF 1