




Product NO.		RHT-631-1006		
ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
First	First issue	Gavin	2017/11/03	JIM. KING

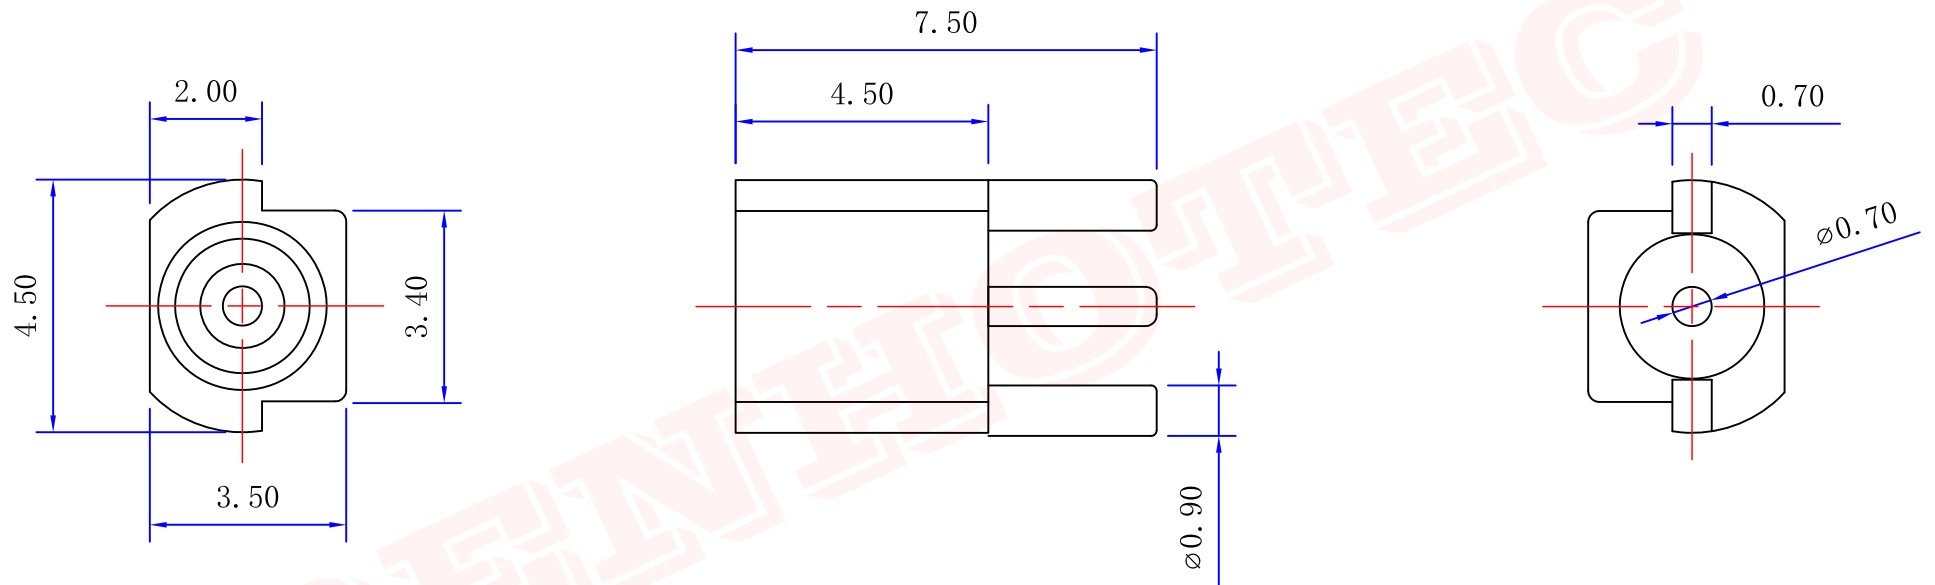

Specifications  
 Impedance: 50 Ohms  
 Frequency Range: 0~6Ghz  
 VSWR: 1.25max  
 Working Voltage: <170 Vrms @ sea level  
 Insulation Resistance: 5000 Ohms min  
 Temperature Range: -40°C TO +125°C  
 Drawings products are in line with ROHS standards

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NONE	1
1	BODY	BRASS	GOLD	1

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	<b>RENHOTEC GROUP</b>	
	PART DESCRIPTION: MMCX JACK PCB MOUNT	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	Appr: JIM. KING	P/N: RHT-631-1006
	Check:	Date: 2017. 11. 03
	Draw: Gavin	Scale: Free Unit: MM Type: Z Page: 1/1