




Product NO.	Renhotec-612-0229			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/1	John kine

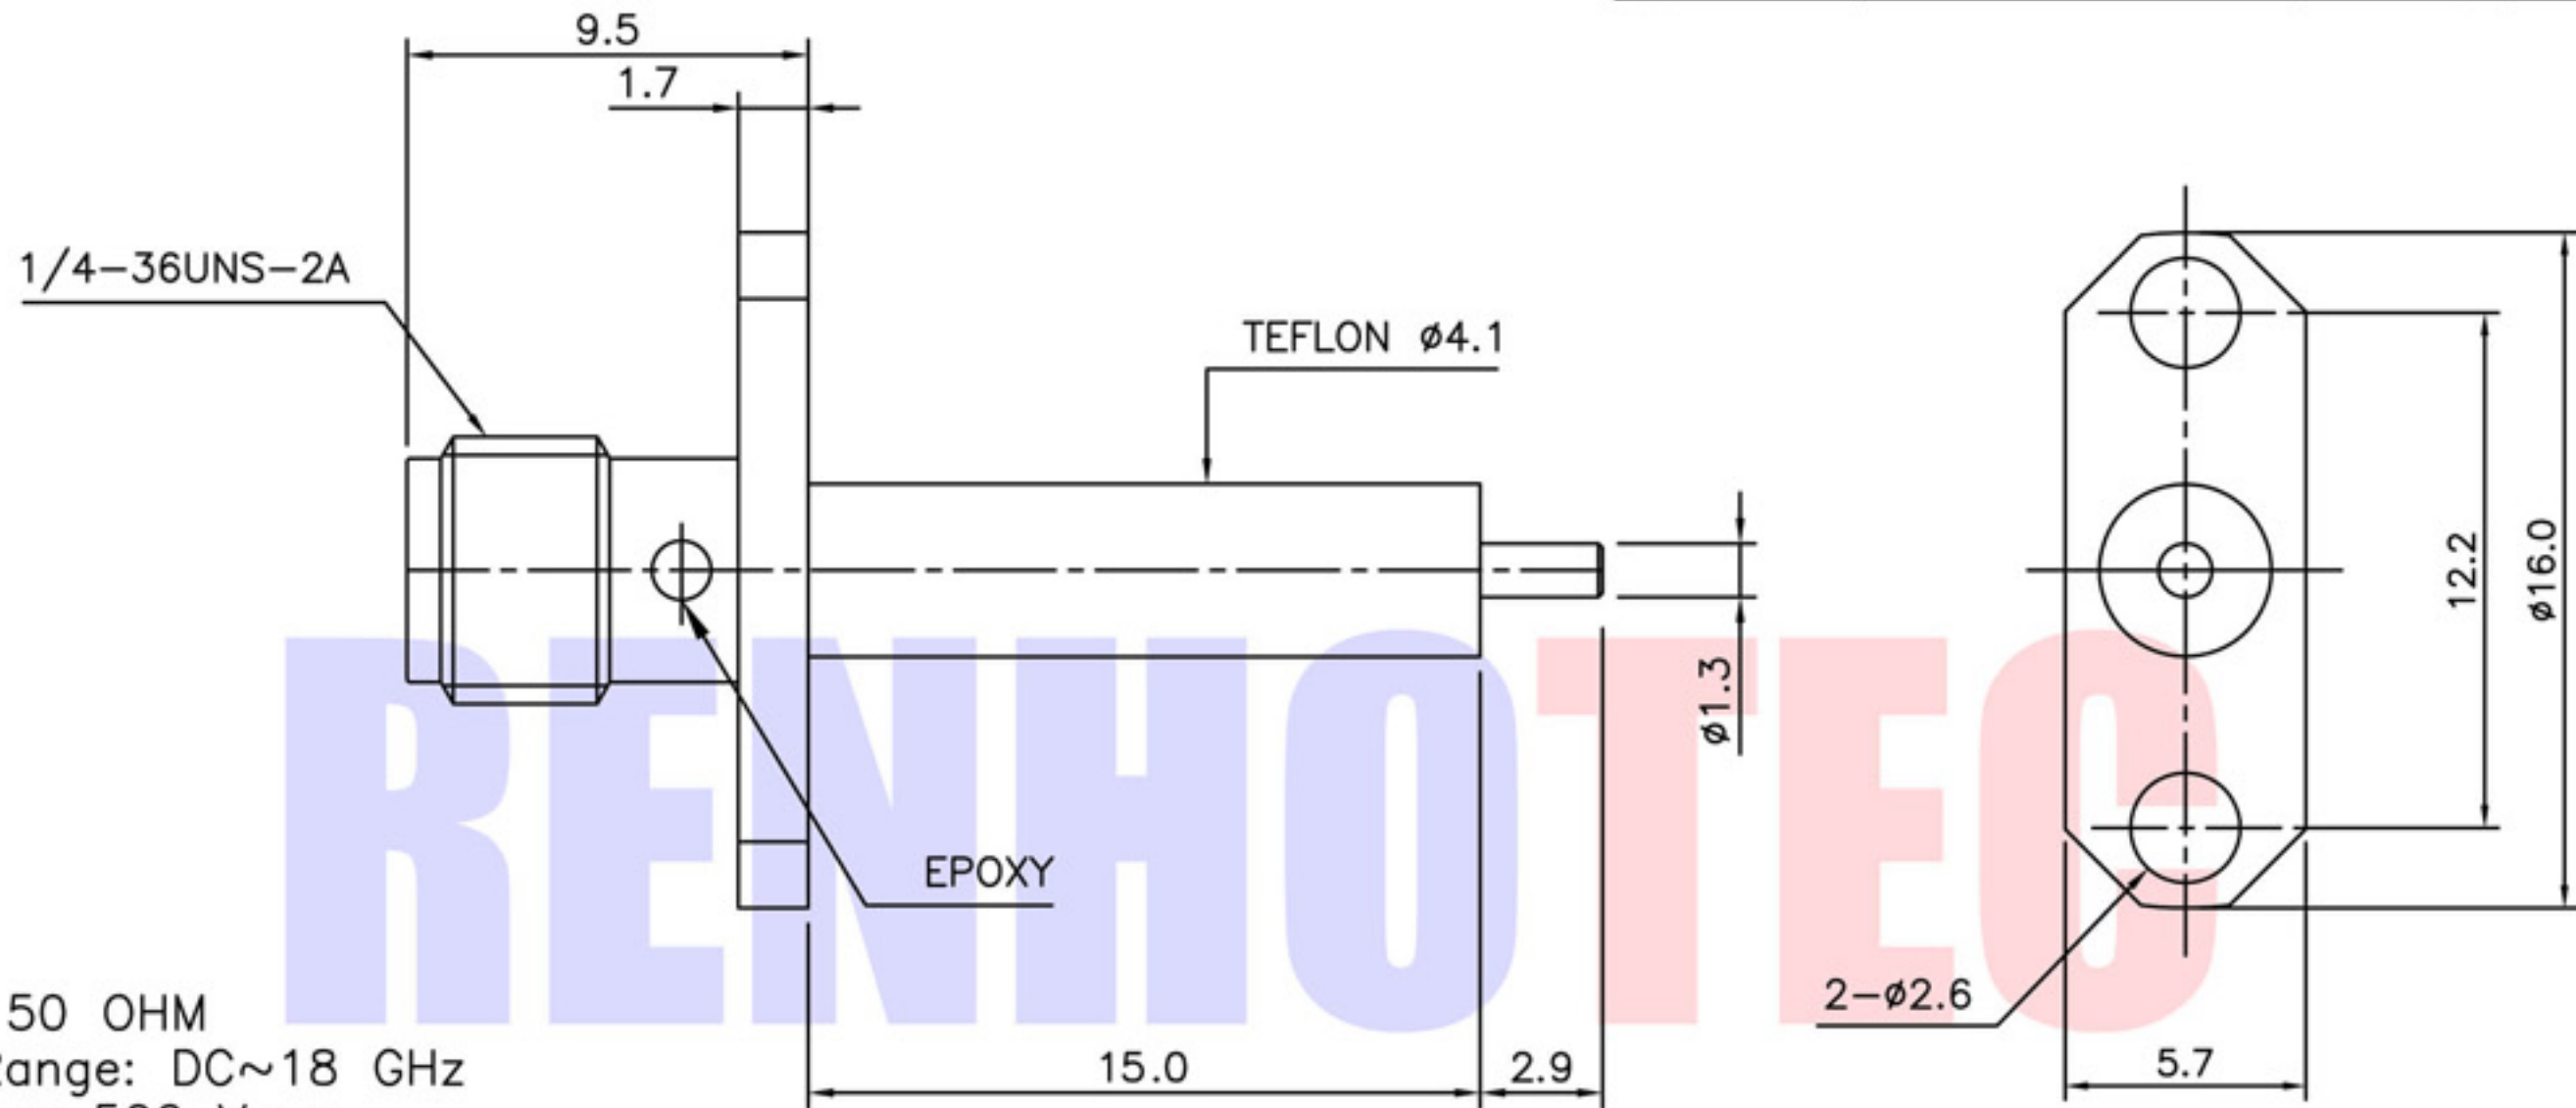

SPECIFICATIONS

Impedance: 50 OHM
 Frequency Range: DC~18 GHz
 Voltage rating: 500 Vrms
 Dielectric Withstanding Voltage: 1500 Vrms
 Durability: 500 Cycles
 Contact retention 6lbs axial
 Temperature Range: -4.0°C to +165°C
 Insulation resistance: 5000MΩ

Connector parts	Materials	Finish
Body	Stainless steel	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6 ±0.10
			6-30 ±0.20
			30-120 ±0.30
			Angular ±2°
DRAWN	Zelin. Zhang	2017/3/1	View
CHECKED			
APPROVALS			UNIT
John Kine			
2017/3/1			MM
SCALE			1:1



RENHOTEC GROUP

Name: SMA 2Hole Panel Female Micro Coaxial END Receptacle			
SIZE A	Product NO. RHT-612-0229	REV B	
DateTime	CAD FILE	SHEET: 1 OF 1	
2017/3/1	D/company drawings/BD		