




Product NO.	Renhotec-612-0255			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

**SPECIFICATIONS**

Impedance: 50 OHM  
 Frequency Range: DC~18 GHz  
 Voltage rating: 335 Vrms  
 Dielectric Withstanding Voltage: 1000 Vrms  
 Contact retention 6lbs axial  
 Temperature Range: -65°C to +125°C  
 Durability: 500 Cycles  
 Interface Dimensions: MIL-STD-348A

1/4-36UNS-2A

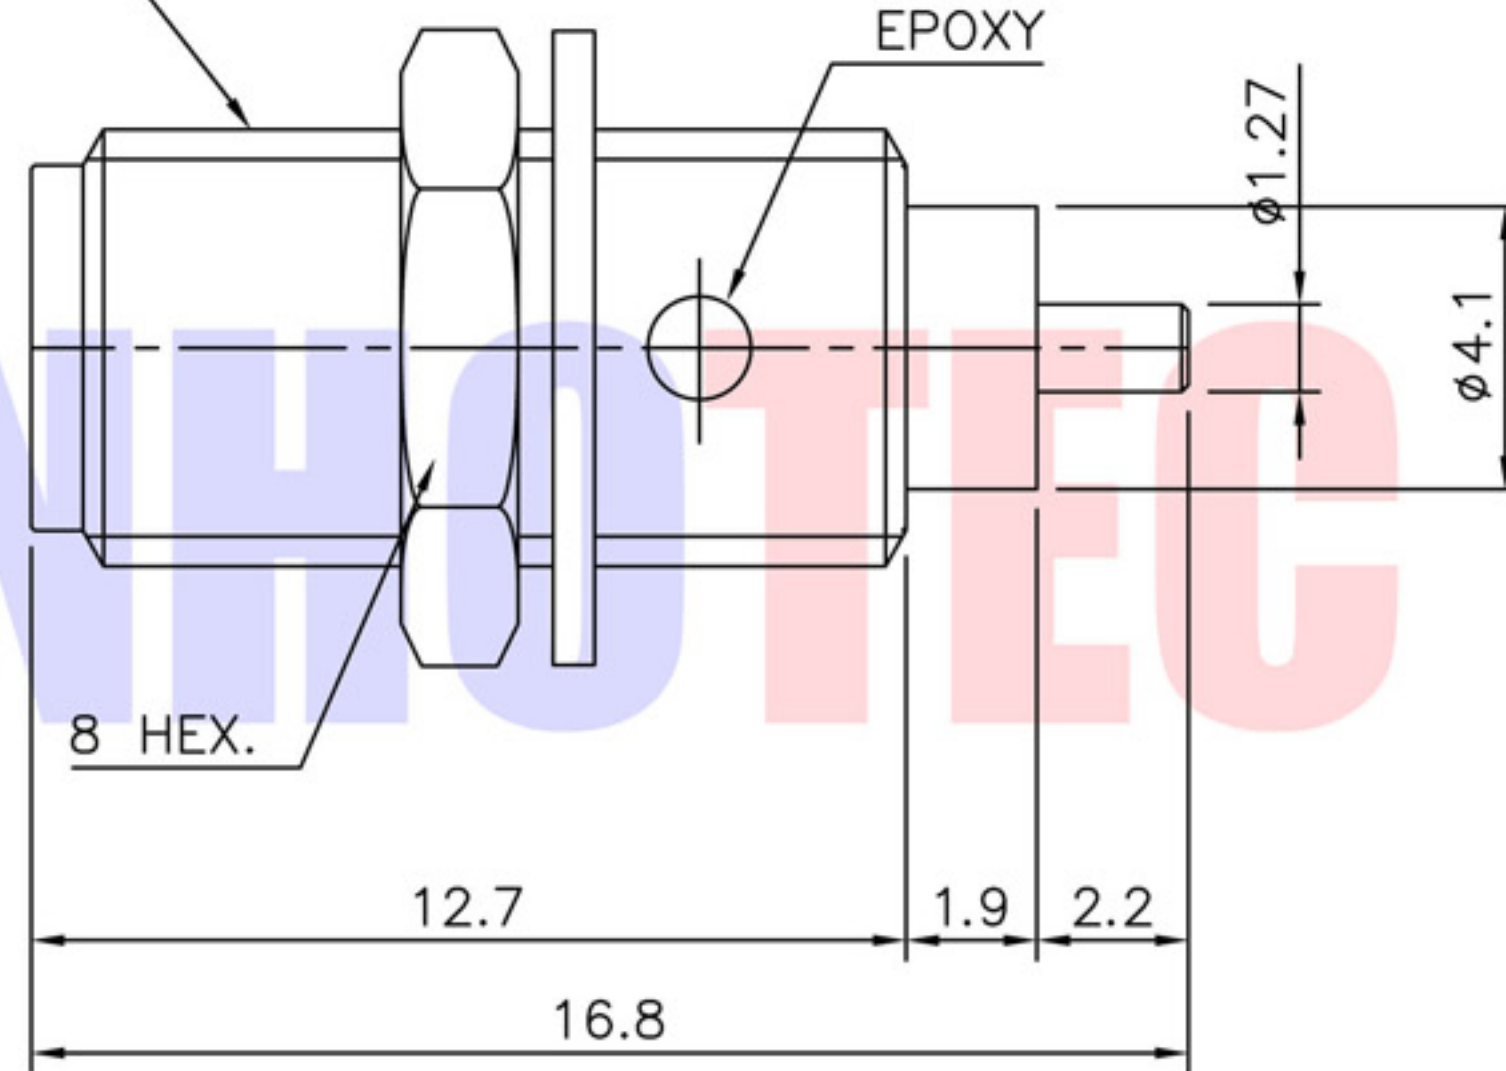

Connector parts	Materials	Finish
Body,Nut,Washer	Stainless steel	Gold plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

SMA-Bulkhead JACK  
 Receptacles  
 (Epoxy-Cativated)

NOTE:		Tolerance	0-6 ±0.10		
			6-30 ±0.20		
			30-120 ±0.30	Name: SMA Bulkhead Jack Receptacle	
			Angular ±2°	View	
DRAWN	Zelin. Zhang	2017/3/2		UNIT	MM
CHECKED				SCALE	1:1
APPROVALS	John Kine	2017/3/2		DateTime	2017/3/2
				CAD FILE	D/company drawings/BD
				Product NO.	RHT-612-0255
				REV	A
				SHEET: 1 OF 1	