




SPECIFICATION

Dielectric Withstanding Voltage : 1000V min
 Working Voltage : < 335W
 Characteristics impedance : 50 ohm
 Frequency Range : DC~18GHz
 Insulation Resistance : 5000MΩ min
 Contact Resistance : < 3mΩ
 Contact Resistance Outer Conductor : < 2mΩ
 Temperature range : -65~+125°C
 VSWR : <1.07+0.01F
 Insertion Loss : 0.15dB@6GHz

Product NO.	Renhotec-612-0275			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/2	John kine

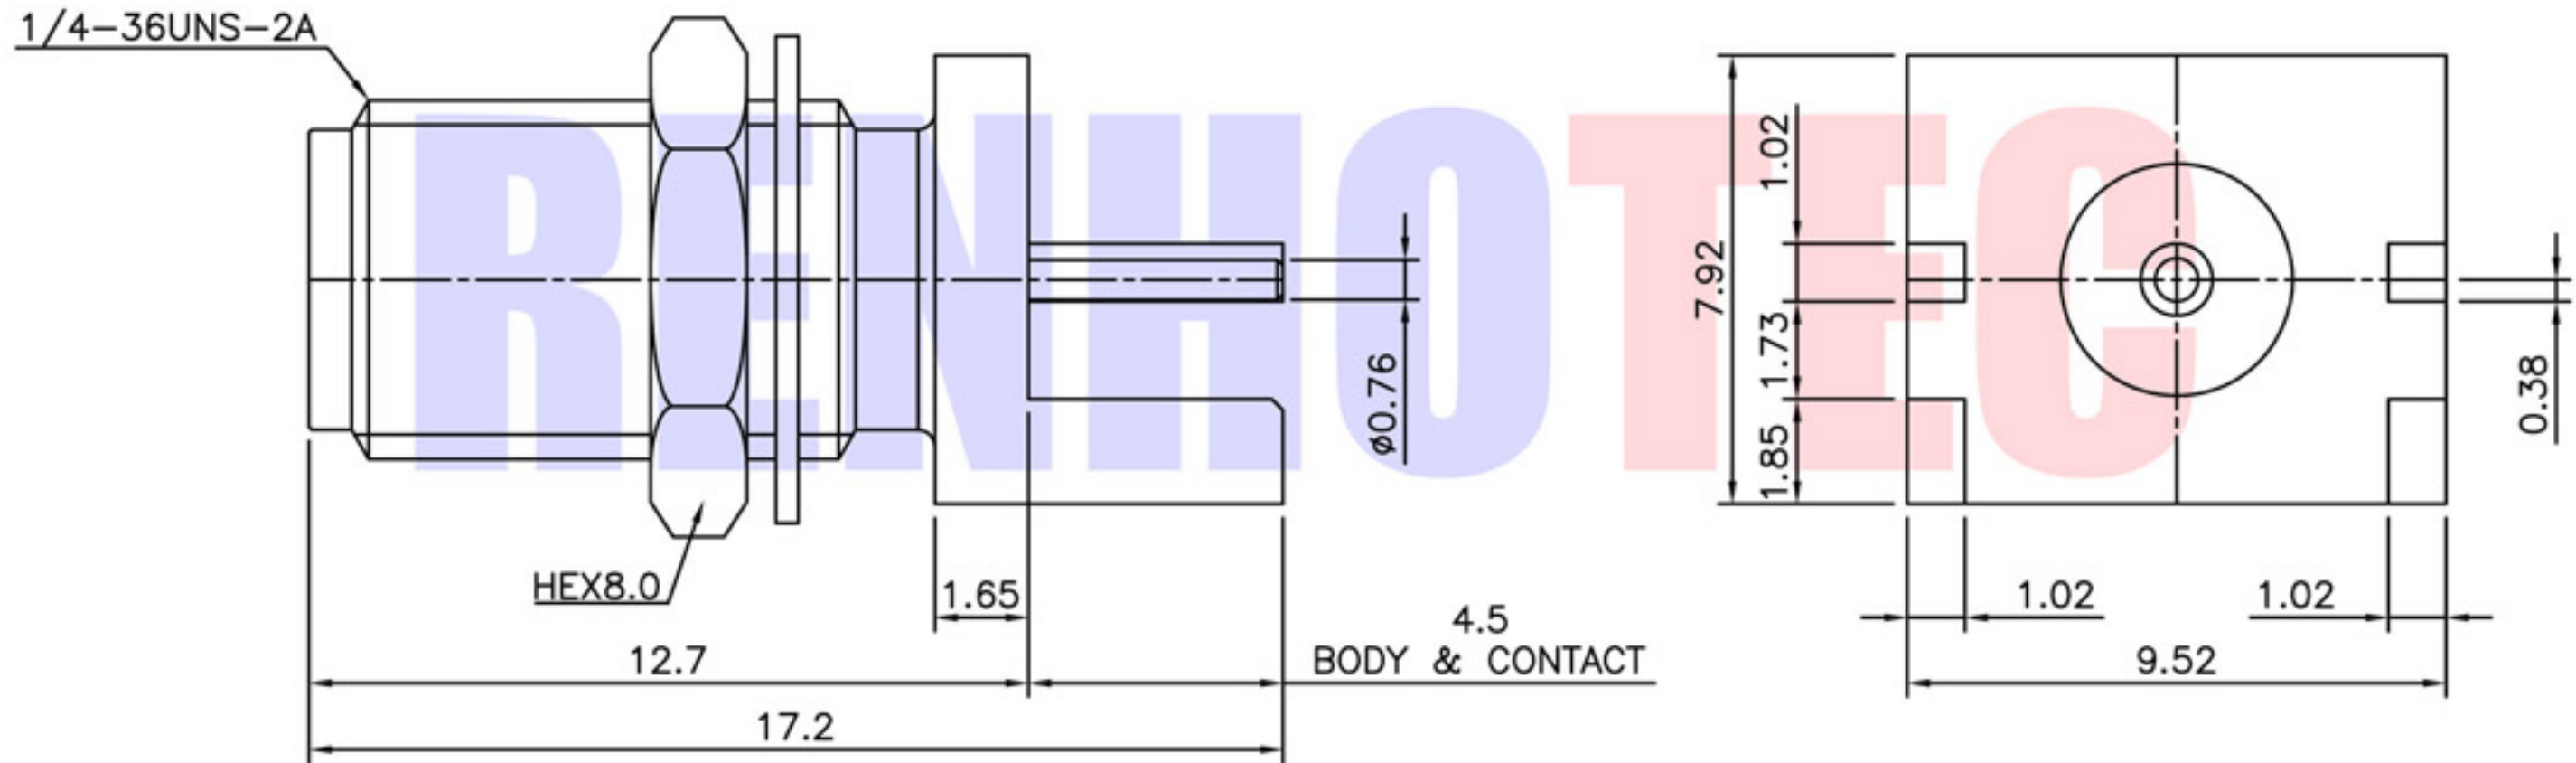

Connector parts	Materials	Finish
Body,Nut,Washer	Brass	Gold Plated
Center contact	BeCu	Gold Plated
Insulator	TEFLON	-

SMA End Launch Bulkhead Jack Receptacle
 -Round Contact(1.60Board)

NOTE:		Tolerance	0-6 ±0.10		
			6-30 ±0.20		
DRAWN		View	30-120 ±0.30	Name: Edge Mount SMA Jack	
Zelin. Zhang	2017/3/2		Angular ±2°		
CHECKED		UNIT	MM	SIZE	Product NO. RHT-612-0275
APPROVALS		SCALE	1:1	REV	A
John Kine	2017/3/2			DateTime	2017/3/2
				CAD FILE	D/company drawings/BD
				SHEET: 1 OF 1	