

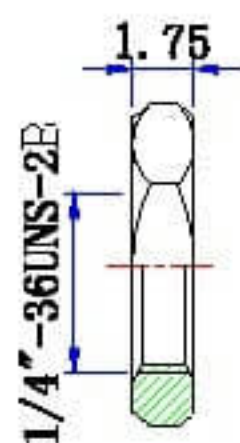
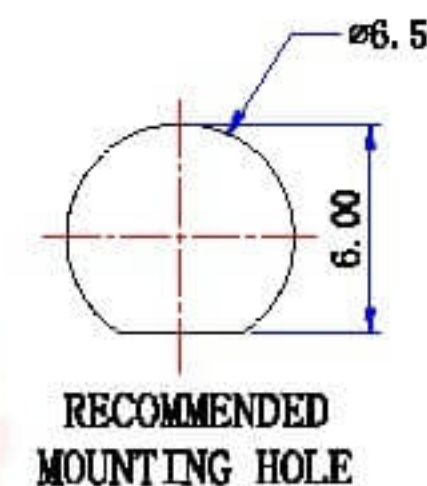


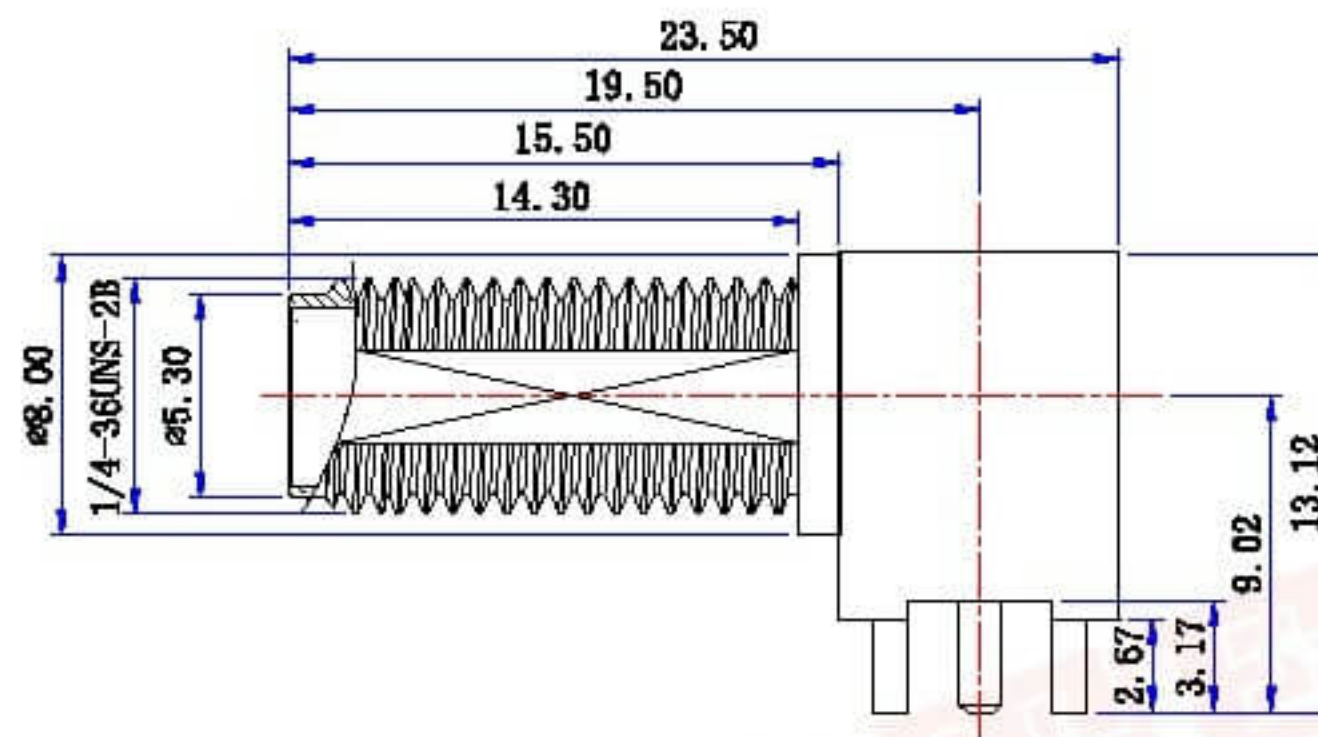


Product NO. RHT-612-0486



REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Gavin	2018/09/06	JIM KING

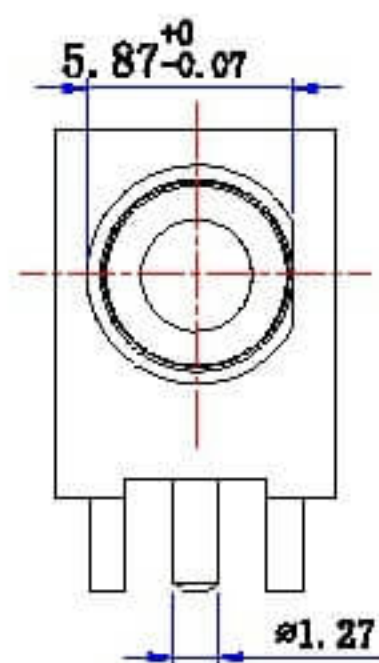

HEX NUT

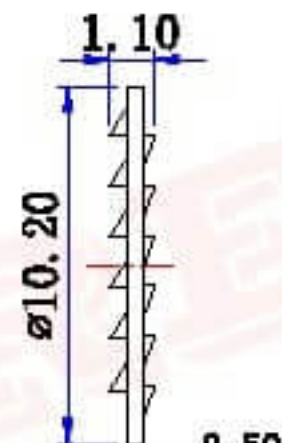

WASHER

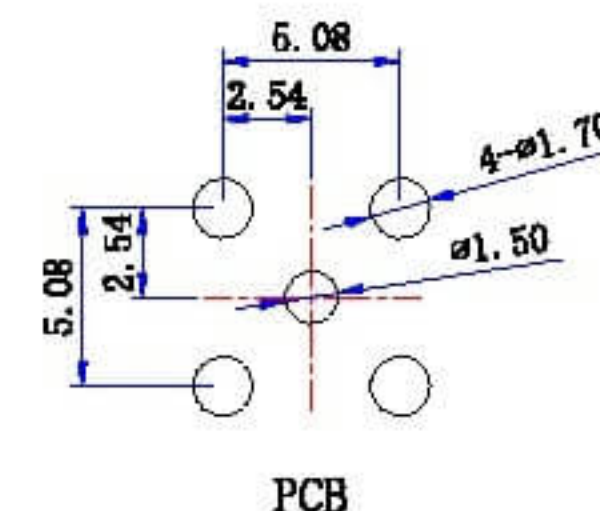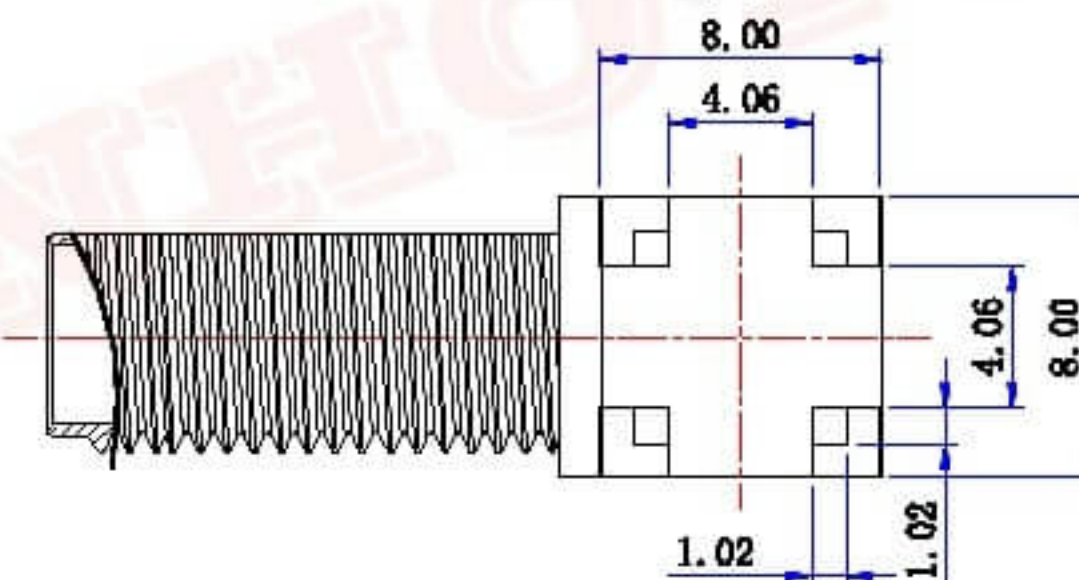

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~6GHz

VSWR: 1.3MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

Relative temperature: ≤95%(40°C ± 2°C)


NO	DESCRIPTION	MATERIAL	FINISH	QTY
6	NUT	BRASS	GOLD	1
4	GASKET	BRASS	GOLD	1
3	PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NONE	1
1	BODY	BRASS	GOLD	1

-TOLERANCES-
UNLESS OTHERWISE
SPECIFIED

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 3mm ± 0.12mm
3 - 30mm ± 0.15mm
30 - 120mm ± 0.20mm



RENHOTECH GROUP



PART DESCRIPTION:
R/A SMA JACK FOR PCB

Appd: JIM KING

P/N: RHT-612-0486

Check:

Date	Scale	Unit	Type	Page
------	-------	------	------	------

Draw: Gavin

2018.09.06	Free	MM	Z	1/1
------------	------	----	---	-----