




Product NO.	Renhotec-626-0231			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First Issue	Mr. Wang	2017/3/6	John kine

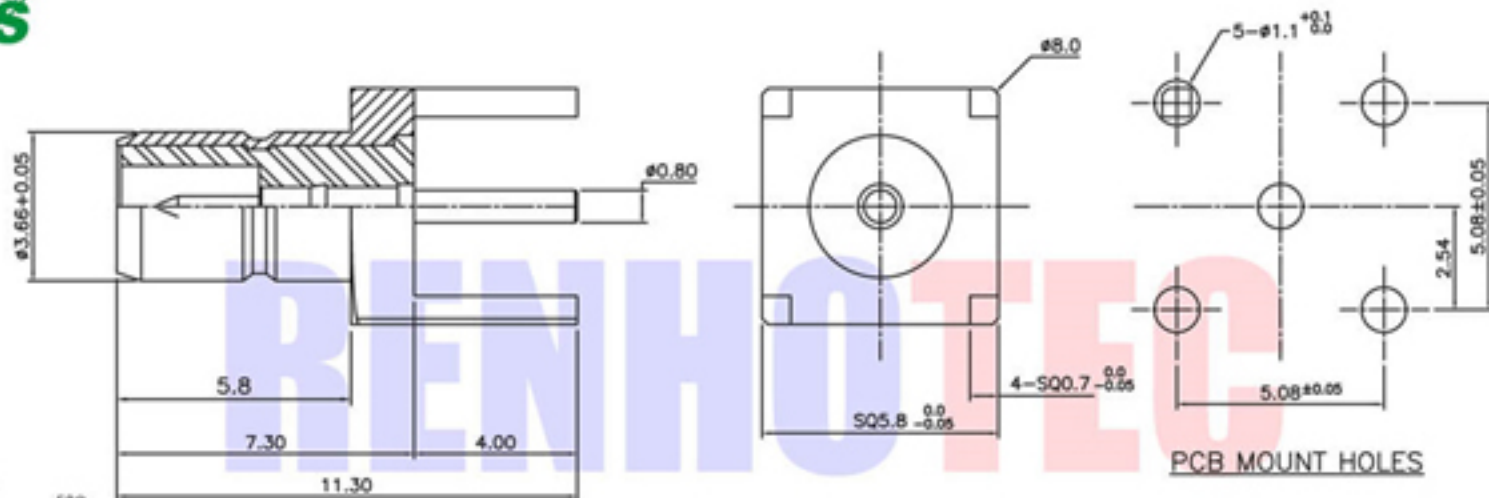

ELECTRICAL DATA

Impedance	50Ω
Frequency range	DC ~ 4GHz
Contact current	DC 1.5A max
Voltage rating	250V rms
Contact resistance	Center contacts : 3.0mΩ Outer contacts : 0.5mΩ
Insulation resistance	1000MΩ min.
Insertion loss	0.6dB max
V.S.W.R	Straight 1.3±0.04f(GHz) Right angle 1.4±0.06f(GHz)
RF leakage	-55dBm min. between 2~3GHz

ENVIRONMENTAL DATA

Temperature range	-65°C ~ +125°C
Corrosion resistance	MIL-STD-202, Method 101, Condition B.
Moisture resistance	MIL-STD-202, Method 106
Thermal shock	MIL-STD-202, Method 107, Condition B.
Vibration	MIL-STD-202, Method 204, Condition D.

Item	Materials	Plating
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6 ±0.10 6-30 ±0.20 30-120 ±0.30 Angular ±2°		
DRAWN	Zelin. Zhang 2017/3/6				
CHECKED		UNIT	MM	SIZE	Product NO. RHT-626-0231
APPROVALS	John Kine 2017/3/6	SCALE	1:1	Date/Time	2017/3/6
			CAD FILE	D:/company drawings/BD	
			SHEET: 1 OF 1		